


## RAILS "RVA"

This rail type completes the system RM/RV. The RVA has the raceways coated with antifriction material. This type is used when the speed is relatively low (20 m/min max) and the rigidity of the system is critical. A set is composed of two rails RM and two rails RVA. The rails RVA and RV are dimensionally interchangeable. In order to have a good functioning, the temperature of working must be inferior to 50°. Load capacity per unit in cm<sup>2</sup> changes from 4500 N (dynamic) ÷ 7500 N (static). Holes and oil grooves can be carried out on request on the type RVA rails.

Rail type	Width of the bearing surface
RVA 9 2025	1,05 cm
RVA 2025	1,15 cm
RVA 2535	1,5 cm
RVA 3045	1,75 cm
RVA 3555	2,45 cm



# Rails "RM" & "RVA"

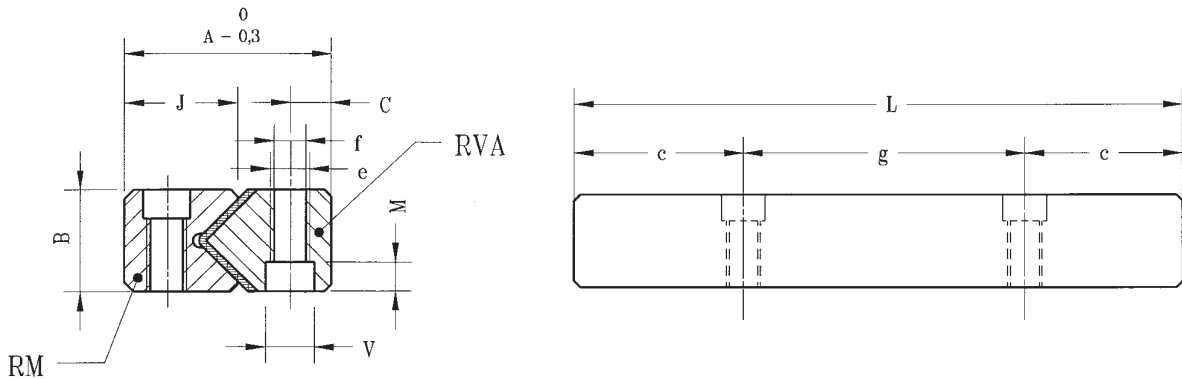

Rail type RM	Rails type RVA	Type RM weight (g)	Type RVA weight (g)	L	g	c	A	B	J	C	e	f	V	M
92025- 200	92025-200	685	695	200	1x100									
92025- 300	92025-300	1020	1030	300	2x100									
92025- 400	92025-400	1355	1365	400	3x100									
92025- 500	92025-500	1690	1700	500	4x100									
92025- 600	92025-600	2025	2035	600	5x100									
92025- 700		2360		700	6x100	50	44	22	24	9	M8	6,8	10,5	6,2
92025- 800		2695		800	7x100									
92025- 900		3030		900	8x100									
92025-1000		3365		1000	9x100									
92025-1100		3700		1100	10x100									
92025-1200		4035		1200	11x100									
2025- 200	2025-200	900	900	200	1x100									
2025- 300	2025-300	1350	1350	300	2x100									
2025- 400	2025-400	1830	1800	400	3x100									
2025- 500	2025-500	2295	2250	500	4x100									
2025- 600	2025-600	2760	2700	600	5x100	50	52	25	28	10	M10	8,5	13,5	8,2
2025- 700		3225		700	6x100									
2025- 800		3690		800	7x100									
2025- 900		4155		900	8x100									
2025-1000		4620		1000	9x100									
2025-1100		5085		1100	10x100									
2025-1200		5550		1200	11x100									
2535- 300	2535-300	1905	1965	300	2x100									
2535- 400	2535-400	2540	2620	400	3x100									
2535- 500	2535-500	3175	3275	500	4x100									
2535- 600	2535-600	3810	3930	600	5x100	50	62	30	34	12	M12	10,5	16,5	10,2
2535- 700		4445		700	6x100									
2535- 800		5080		800	7x100									
2535- 900		5715		900	8x100									
2535-1000		6350		1000	9x100									
2535-1100		6985		1100	10x100									
2535-1200		7620		1200	11x100									
3045- 400	3045-400	3660	3460	400	3x100									
3045- 500	3045-500	4575	4325	500	4x100									
3045- 600	3045-600	5490	5190	600	5x100									
3045- 700		6405		700	6x100	50	74	35	42,5	14	M14	12,5	18,5	12,2
3045- 800		7320		800	7x100									
3045- 900		8235		900	8x100									
3045-1000		9150		1000	9x100									
3045-1100		10065		1100	10x100									
3045-1200		10980		1200	11x100									
3555- 500	3555-500	6170	6100	500	4x100									
3555- 600	3555-600	7410	7320	600	5x100									
3555- 700		8650		700	6x100									
3555- 800		9890		800	7x100	50	78	45	45	14	M14	12,5	18,5	12,2
3555- 900		11130		900	8x100									
3555-1000		12370		1000	9x100									
3555-1100		13610		1100	10x100									
3555-1200		14850		1200	11x100									

The supply of RM rails as one single piece up to a maximum length of 1600 mm is also available.